


Power board COB1605

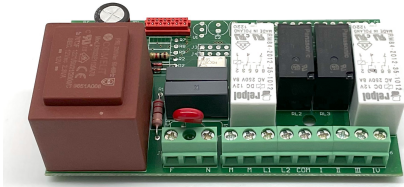

Power board for extractor hoods and management of motor, lights and accessories. Motor management sequential 3/4 speed (multi-winding) or brushless with PWM management and On-Off lights control maximum 1200W. It is possible to add a 433MHz Rx module for radio frequency and duct opening control, free contacts or management of additional duct motorisation. The board complies with the latest Energy Label and Ecodesign standards. Standby consumption is less than 0.5W and it is possible to plug in a Cobofra Wi-Fi module for control via apps, Alexa and Google Home.

Board technology	Relay
Motor output	220-240VAC 50-60Hz - Max 600W
Output 3	/
Micro contact 1	Optional
Standby consumption	< 0,5W
BT/Wi-Fi Technology	Optional
Product size	100x57 mm

Input voltage	220-240VAC 50-60Hz
Light output	220-240VAC 50-60Hz - Max 1200W
Output 4	/
Micro contact 2	Optional
Remote control technology	433MHz - Optional
Operating temperature	0° +60°
Conformity	CE/Energy Label/Ecodesign

Field of application:

Professional extractor hoods

Extractor hoods

Via Enrico Fermi 10 – Z.I. – 35020 LEGNARO (PD) – tel 049 790876 Fax 049 790993
 C.F./P.IVA 00388610289
 Numero REA 251745
cobofra@cobofra.com

-ELECTRONIC CONTROLS

-INVERTER

-CABLING

-LIGHTING SOLUTIONS

