


## Power board COB1903

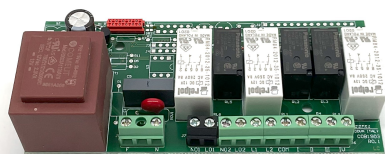

Power board for extractor hoods and management of motor, lights and accessories, with 110V at 60Hz power supply. Motor management sequential 3/4 speed (multi-winding) or brushless with PWM management and On-Off lights control maximum 1200W. It is possible to add a 433MHz Rx module for radio frequency and duct opening control, free contacts or management of additional duct motorisation. The board complies with the latest Energy Label and Ecodesign standards. Standby consumption is less than 0.5W and it is possible to plug in a Cobofra Wi-Fi module for control via apps, Alexa and Google Home. It has two additional relay outputs for managing additional accessories (plasma filter for sanitisation, heating resistors for anti-condensation, additional lights or other).

Board technology	Relay
Motor output	110V 60Hz - Max 600W
Output 3	110V 60Hz - Max 600W
Micro contact 1	Optional
Standby consumption	< 0,5W
BT/Wi-Fi Technology	Optional
Product size	123x57 mm

Input voltage	110V 60Hz
Light output	110V 60Hz - Max 1200W
Output 4	110V 60Hz - Max 600W
Micro contact 2	Optional
Remote control technology	433MHz - Optional
Operating temperature	0° +60°
Conformity	UL/Energy Label/Ecodesign

### Field of application:

Professional extractor hoods

Extractor hoods

Via Enrico Fermi 10 – Z.I. – 35020 LEGNARO (PD) – tel 049 790876 Fax 049 790993  
C.F./P.IVA 00388610289  
Numero REA 251745  
[cobofra@cobofra.com](mailto:cobofra@cobofra.com)

**-ELECTRONIC CONTROLS**

**-INVERTER**

**-CABLING**

**-LIGHTING SOLUTIONS**

